# Photo Laminator

## OWNER'S MANUAL

ES-400

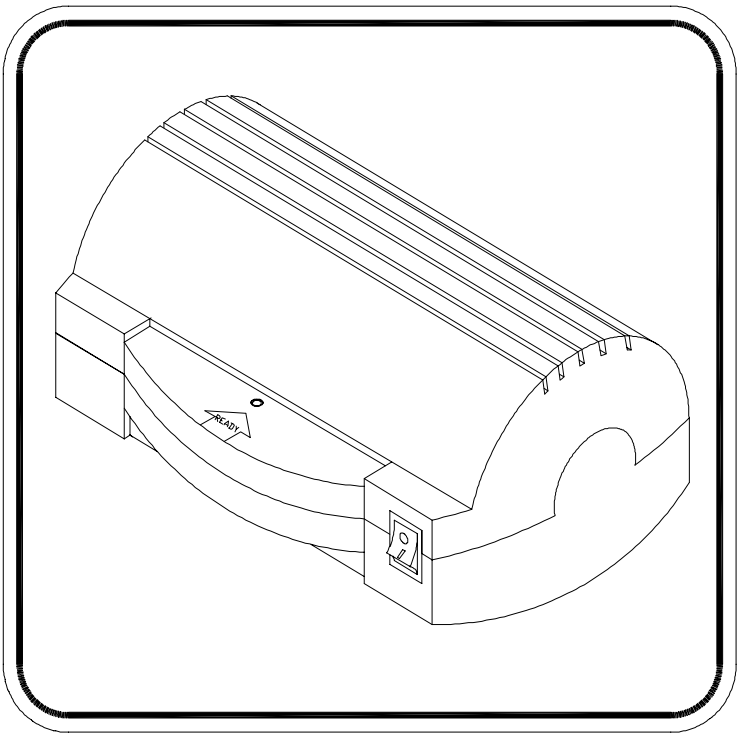


PLEASE READ AND SAVE INSTRUCTIONS

## ROYAL SOVEREIGN INTL.INC.

# TABLE OF CONTENTS

TOPICS PAGE


MAJOR PARTS ---------- 2
INTRODUCTION ---------- 3
SAFETY PRECAUTIONS ---------- 3
OPERATING INSTRUCTIONS ---------- 4
HOW TO CLEAN THE ROLLERS ---------- 4
TROUBLESHOOTING ---------- 5
SPECIFICATIONS ---------- 5


# MAJOR PARTS

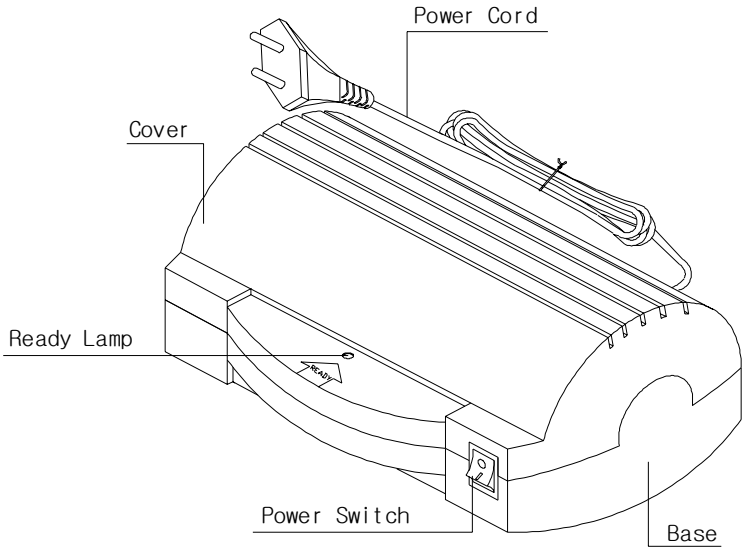

# INTRODUCTION

Thank you for purchasing Royal Sovereign's new EL line. This has been designed and manufactured to provide both professional and nonprofessional service in a wide rang of environment especially in a picture environment. For proper usage and maintenanc read and follow carefully. Since it covers all models within this line, there may be sections that do not apply to your machine. Please follow instructions that specially apply to your model.

# SAFETY PRECAUTIONS

The safety recommmendations outlined in this section are to be read and followed before operating the machines. Keep this information for future reference. Failure to comply with any of the following safety procedures could result in serious injury.

1. To prevent the possibility of electrical shock, do not immerse machine in water or permit liquids to get inside.
2. To prevent the possibility of fire, do not allow articles of clothing (neckties, scarves, paper etc.) to get inside.
3. Do not insert sharp objects (pin, clip, coin etc.) into front or rear openings of the machine.
4. Do not attempt to laminate items that exceed total recommended material thickness.
5. Do not operate machines for any other purpose other than its intended use.
6. Do not use when the electric plug is cracked or deformed.
7. Turn off the power when unattended or not in use. Unplug machine before moving or when it is not in use for an extended period of time.
8. This machine is intended for indoor use only.
9. Do not alter the electric plug in any way.

10. During the operation, the machine has high heat. Keep children away from the machine.

11.To reduce the risk of electric shock, this appliance has a polarized plug (one blade is wider than the other). This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reveres the plug. If it still does not fit, contact a qualified electrician to install the proper outlet. Do not change the plug in any way. ( Ac120V only)

## OPERATING INSTRUCTIONS

1. Place and use the laminator on a sturdy, flat work surface.
2. Plug the laminator into a power source that matches the laminator's rate of voltage.
3. Press the power switch to 'ON' position.
   (Red lamp will illuminate and the motor starts to operate.)
4. Allow approximately Max 9minutes to preheat. When the proper temperature is reached, the 'READY' light will illuminate.
5. After 'READY' light is lighted completely, place the item to be laminated in the laminatin pouch and insert pouch squarely into the front opening.
   (Do not laminate pouch film only without an item. Do not use unsealed pouch film. It causes jams.)
6. After the finished laminated item is fed completely out through the rear of the laminator, insert another pouch into the front opening.
7. Turn off the machine and use plug off completely from a power source.
8. After cooling down completely, keep the place to avoid the direct light.

## HOW TO CLEAN THE ROLLER

When melted adhesive is found at the surface of finished item, insert 0.5mm thick white paper into the front opening and let it pass through the laminator.

Then, the melted adhesive stuck to the roller can be removed.

Periodical roller cleaning keeps high quality lamination.

# TROUBLESHOOTING

| Symptom | Check Point |
|---|---|
| Mortor doesn't work. | 1. Check if the power cord is plugged in. |
| | 2. Check if the switch is on. |
| | |

# SPECIFICATIONS

| DESCRIPTION | ES-400 |
|---|---|
| Dimensions(w*d*h ) | 210×130×85 (mm) |
| | 8.26" x 5.11" x 3.34" |
| Max.Laminating Width(mm) | 110 ( 4.33") |
| Max.Laminating Thickness(mm) | 1.2 |
| Film Thinckness(micron) | 75 ~ 100 (3 - 4 mil) |
| Number of rollers(EA) | 2 |
| Reverse Function | NO |
| Cold Function | NO |
| Heat Source | Hot shoe |
| Ready Time | Max 9min |
| Motor Type | AC |
| Laminating Speed(mm/min) | 330 |
| Weight(kg) | 1.2 (2.64 lbs.) |
| Voltage/Cycle | AC 100V.120V.220V~240V.60Hz/50Hz |
| Power Consumption(W) | 100 |

# LIMITED ONE YEAR WARRANTY

## Terms and Conditions

1. This Warranty applies to repair or replacement of product found to be defective in material or workmanship for one year from the date of original purchase. This warranty is extended only to the original purchaser.

2. This warranty does not apply to damage resulting from, abuse, misuse, or improper maintenance or damage that is attributable to acts of God. Royal Sovereign is not liable for incidental or consequential damages of any nature. This limitation would not apply if you live in those states that do not permit the exclusion or limitation of incidental or consequential damages

3. Royal Sovereign will repair or replace this product if it is found defective in material or workmanship. Defective product must be returned to Royal Sovereign, freight prepaid, with proof of purchase and $ 10.00 for handling, return packaging and shipping charges.

4. Return defective product to the following address with a detailed description of the problem. Please pack it in its original carton with return address. All shipping charges must be paid by sender.

CALL ROYAL SOVEREIGN FOR ALL YOUR LAMINATING NEEDS
(800) 397-1025

ES-400

ROYAL SOVEREIGN INTL., INC.
100 WEST SHEFFIELD AVENUE
ENGLEWOOD, NJ 07631-1809
Tel : (800)397-1025/201-568-0830
Fax : 201-568-1079